

### 1. Scope

The present specifications shall apply to an RA13.

### 2. Outline

Type	Silicon Schottky Barrier Diode
Structure	Resin Molded
Applications	High Frequency Rectification

### 3. Flammability

UL94V-0(Equivalent)

## 4. Absolute maximum ratings




No.	Item	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	$V_{RSM}$	V	30	
2	Peak Reverse Voltage	$V_{RM}$	V	30	
3	Average Forward Current	$I_{F(AV)}$	A	2.0	Refer to Derating of 7
4	Peak Surge Forward Current	$I_{FSM}$	A	50	10msec. Half sinewave, one shot
5	$I^2t$ Limiting Value	$I^2t$	$A^2s$	12.5	$1msec \leq t \leq 10msec$
6	Junction Temperature	$T_j$	$^{\circ}C$	-40~+125	
7	Storage Temperature	$T_{stg}$	$^{\circ}C$	-40~+125	

5. Electrical characteristics ( $T_a=25^{\circ}C$  , unless otherwise specified)



No.	Item	Symbol	Unit	Value	Conditions
1	Forward Voltage Drop	$V_F$	V	0.36 max.	$I_F=2.0A$
2	Reverse Leakage Current	$I_R$	mA	3.0 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	mA	140 max.	$V_R=V_{RM}, T_j=100^{\circ}C$
4	Thermal Resistance	$R_{th(j-l)}$	$^{\circ}C/W$	15 max.	Between Junction and Lead

Note) This product is designed in a manner that the forward loss should be minimized, however as a result the reverse leakage current cannot be helped being large.  
Therefore, in using product attention should be paid to loss and heat caused by this reverse leakage current.

6. Characteristics

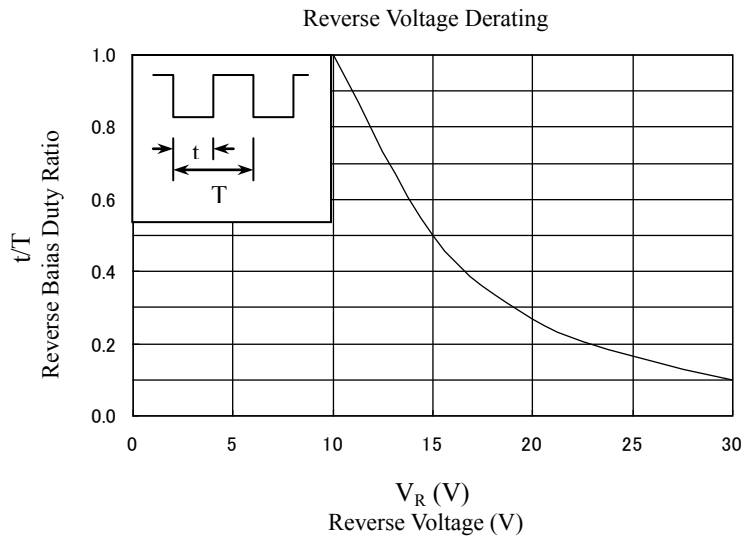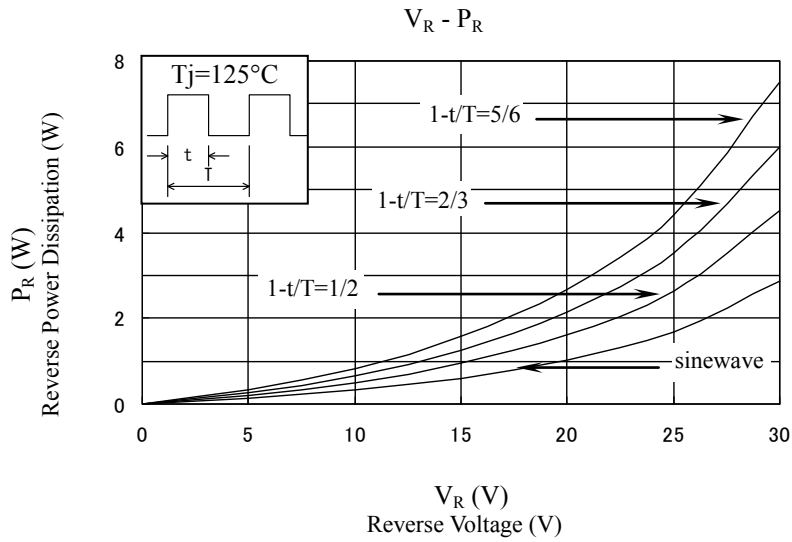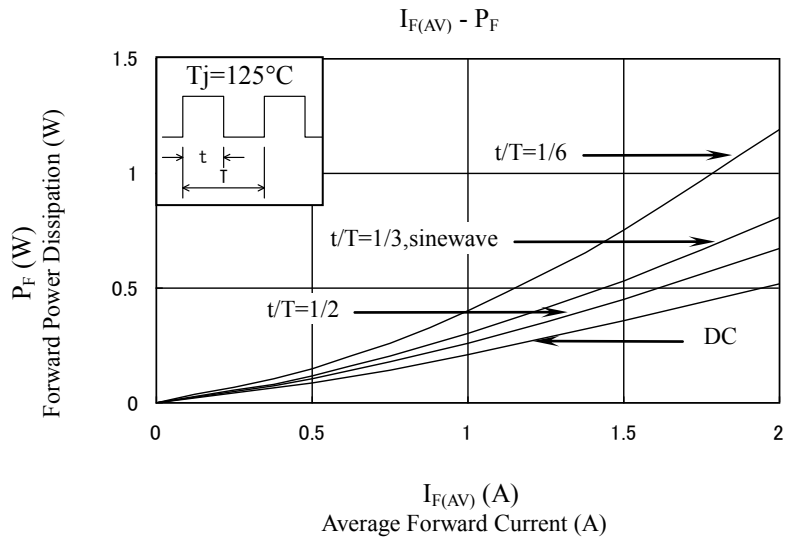


7. Derating

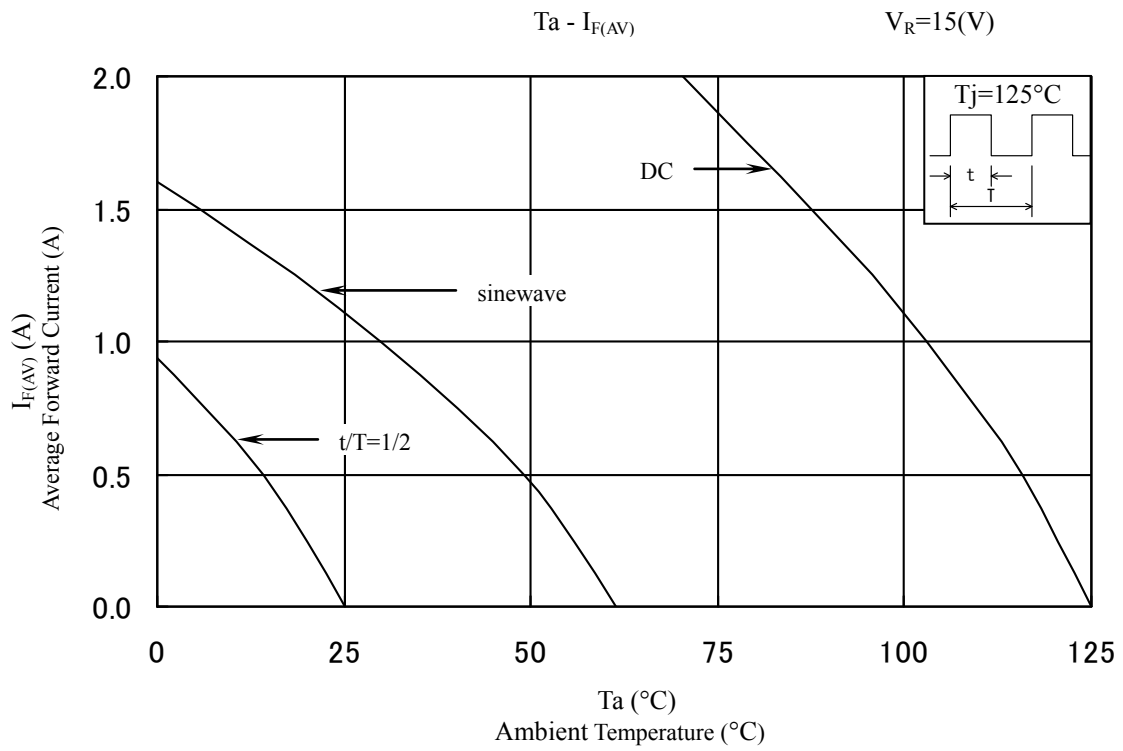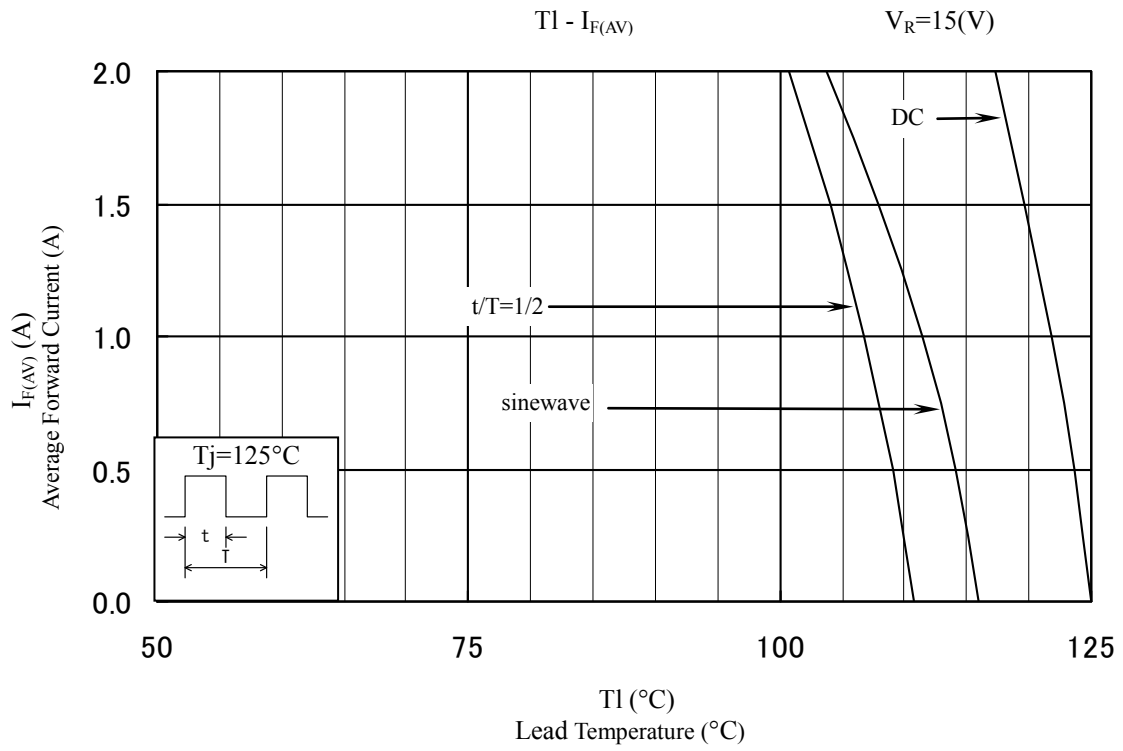

8. Package information

8-1 Package type, physical dimensions and material

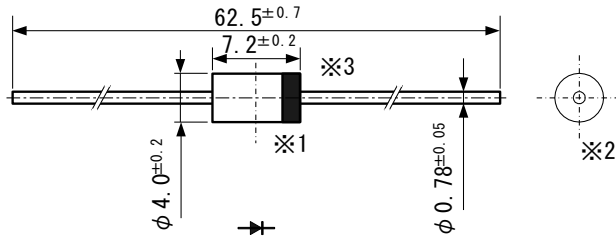

- \*1 The allowance position of Body against the center of whole lead wire is 0.5mm(max.)
- \*2 The centric allowance of lead wire against center of physical body is 0.3mm(max.)
- \*3 The burr may exit up to 2mm from the body of lead

Dimensions in mm

8-2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

8-3 Marking

- ① Type number RA13 as abbreviated of RA13
- ② Lot number 1  
 First digit: Last digit of Year  
 Second digit: Month  
 From 1 to 9 for Jan. to Sep.  
 O for Oct., N for Nov., and D for Dec.
- ③ Lot number 2 (ten days)  
 · : Top of the month  
 · · : Middle of month  
 · · · : End of month

