



NOTES:

1. SUGGESTED MOUNTING HOLE = ϕ .218
2. SOLDER PREFORM SUPPLIED AS HARDWARE.

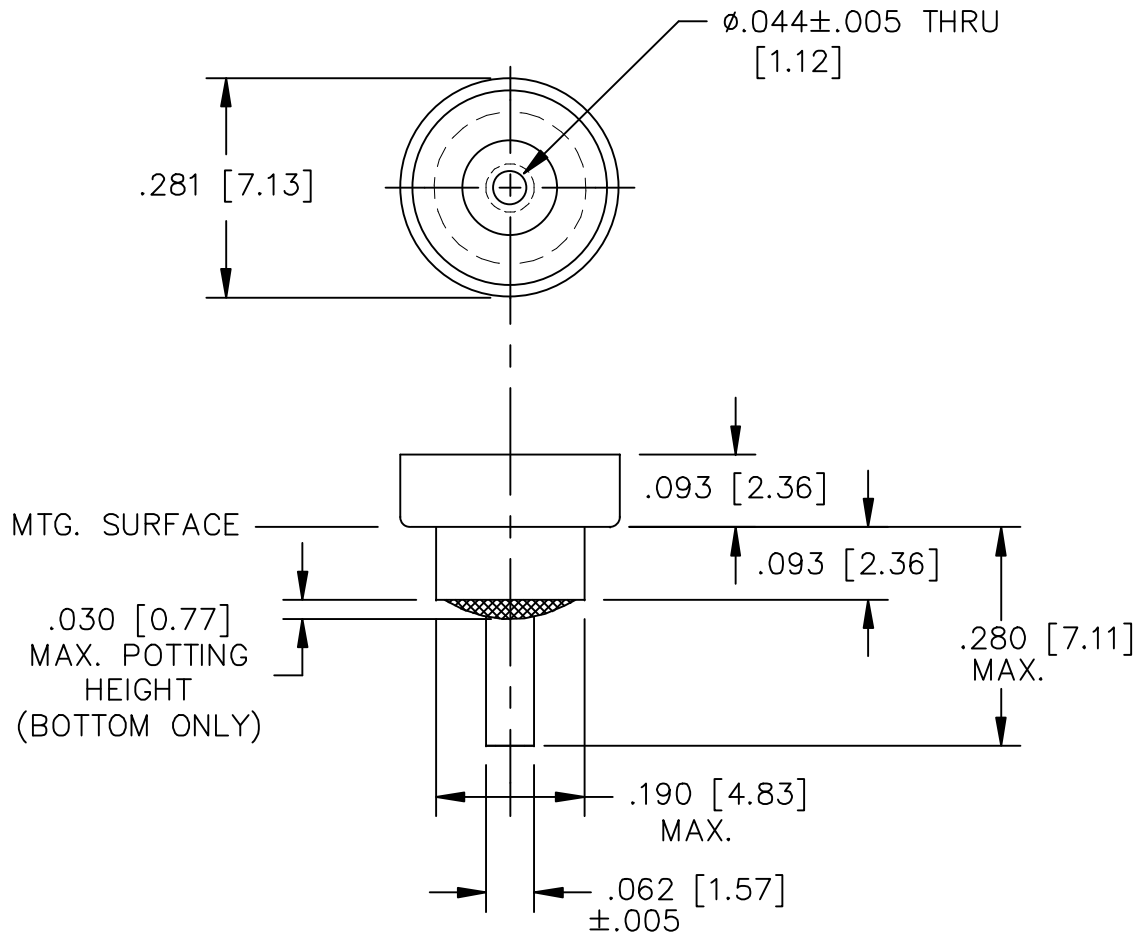

LEAD FINISH:	-----
BUSHING FINISH:	SILVER
CAPACITANCE	470±20%
TEMP. RANGE	-55°C TO 125°C
CURRENT	AMP MAX.
WORKING VOLTAGE	85°C VDC MAX. 125°C VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
10	N/A
100	N/A
1 GHz	N/A
10 GHz	N/A

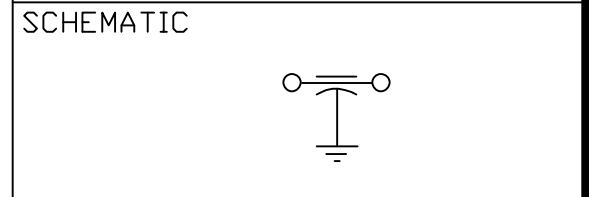

MARKING:

PART: NONE
 BAG:
 54-802-002-471M
 376 MIN./564 MAX.
 DATE CODE
 QTY./BAG (200 MAX.)

	13	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	FAIRVIEW PENNSYLVANIA
	12	CHANGE NOTICE	Fractions ± 1/64	
	11		Dec. .xx±	Dwn. M WOJTECKI Date 2-04-14 Description FT CERAMIC FILTER
			Dec. .xxx±.015	
			Angles ±0° 30'	Apvd. Scale NONE 54802002X5R471M
			CODE IDENT. NO. DLSP2	
	CN #2069			
	CN. 210178			
	CN. 185173			