

C5750X7R1C336M200KB

TDK Item Description : C5750X7R1C336MT****



Application & Main Feature

Commercial Grade (General (Up to 50V))

Series

C5750 [EIA CC2220]



Dimensions

L 5.70mm +/-0.4mm
 W 5.00mm +/-0.4mm
 T 2.00mm +/-0.2mm
 B 0.20mm Min.
 G

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

1C (16Vdc)

Capacitance

33uF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

7.5% Max.


Insulation Resistance

3Mohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

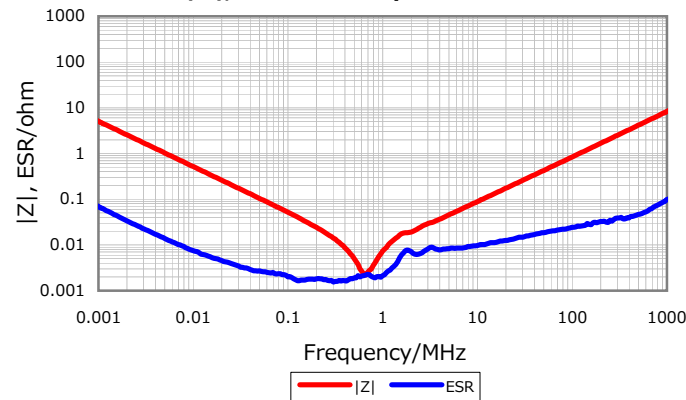


Cap. vs. Freq. Characteristic

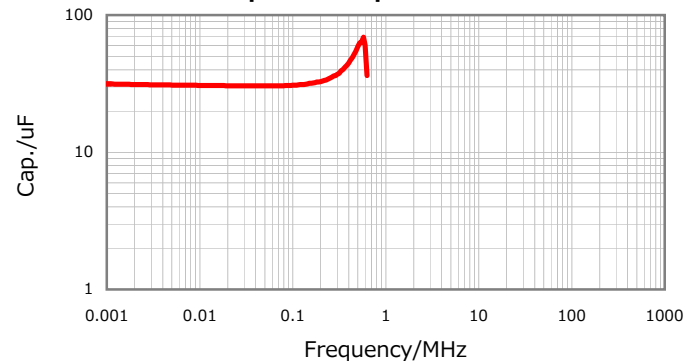

DC Bias Characteristic

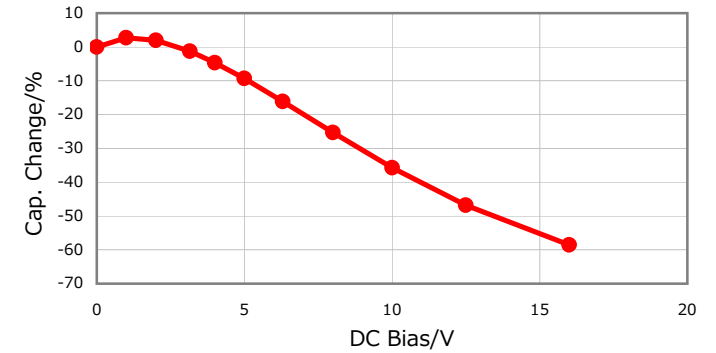

Temperature Characteristics

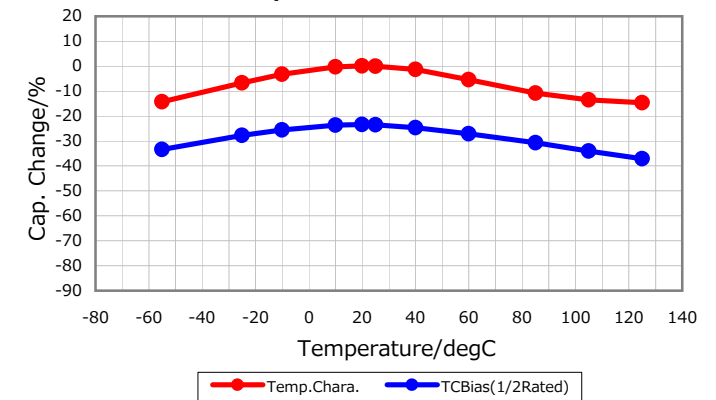

Ripple Temperature Rise Characteristics

