


NOTES:


- 1) MOUNTING HARDWARE REQUIRED.
- 2) SUGGESTED MTG. HOLE: ϕ .147
- 3) THIS IS A LEAD FREE PRODUCT.
- 4) MAX REFLOW IS 245°C FOR 5 SECONDS.



THE USE OF HEXAVALENT CHROMIUM, MERCURY, LEAD, CADMIUM, ASBESTOS, PCT, PCB, PBB, PBDE, IS PROHIBITED IN THE MANUFACTURE OR COMPOSITION OF THIS MATERIAL AS OUTLINED IN THE INTERNATIONAL ROHS DIRECTIVE.

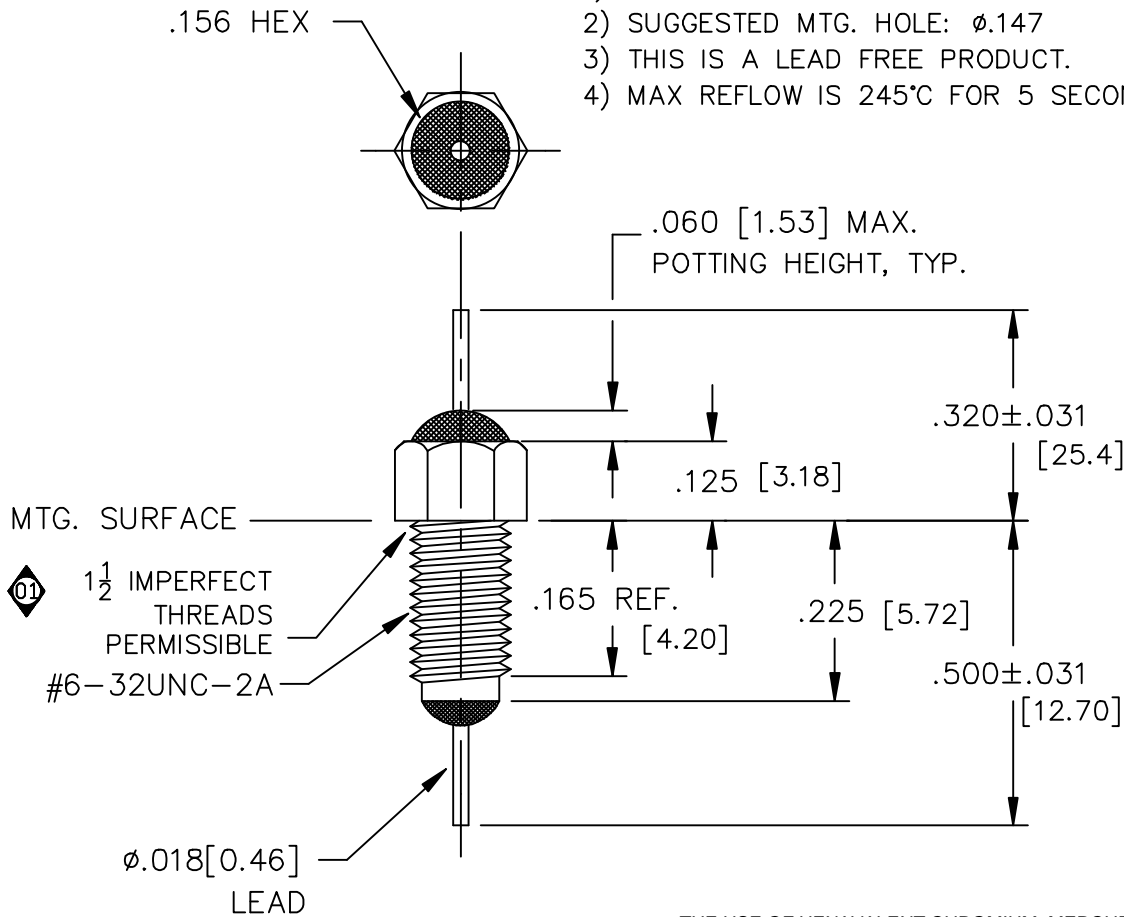

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	5500pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	3 AMP MAX.
WORKING VOLTAGE	125°C 50VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
3	7
10	14
30	30
100	55
300	70
1GHz	70



MARKING:

PART: SF008 (FAIRVIEW)
SF008M (MEXICO)

BAG: 51F-726-008
DATE CODE
QTY/PACK
(50/BAG MAX.)

	01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	FAIRVIEW PENNSYLVANIA	
				Fractions $\pm 1/64$		
	CN 64881-ENG	CN 26441-CPD	CHANGE NOTICE	Dec. .xx±	Dwn. KAUFFMAN	Description FEED THRU RESIN SEAL FILTER
				Dec. .xxx±.010	Date 7-31-12	
				Angles $\pm 0^{\circ} 30'$	ENGR. B. DEVINE	51F-726-008
CODE IDENT. NO. QLSP2	Scale NONE					